



BEAMZ
MADE
EAZY


150.710 V1

LCB14 LED BAR

QUICK START GUIDE

CONTROL MENU

MENU		DESCRIPTION
ADDR	A001-A512	DMX start address
CHND	6Ch	DMX channel mode selection
	8Ch	
	12Ch	
	60Ch	
SLND	NASt	Master
	Sl1	Slave 1
	Sl2	Slave 2
SOUN	Su 0 - Su59	Sound program
	Se 0 - Se99	Sound sensitivity
AUTO	Au 0 - Au59	Auto mode selection
COLO	Co 1 - Co15	Colour macro
NANU	Red	Manual Colour
	Gree	
	Blue	
	Uhit	
DISP	dSIP	Display inversion
VER	Uxx	Software version

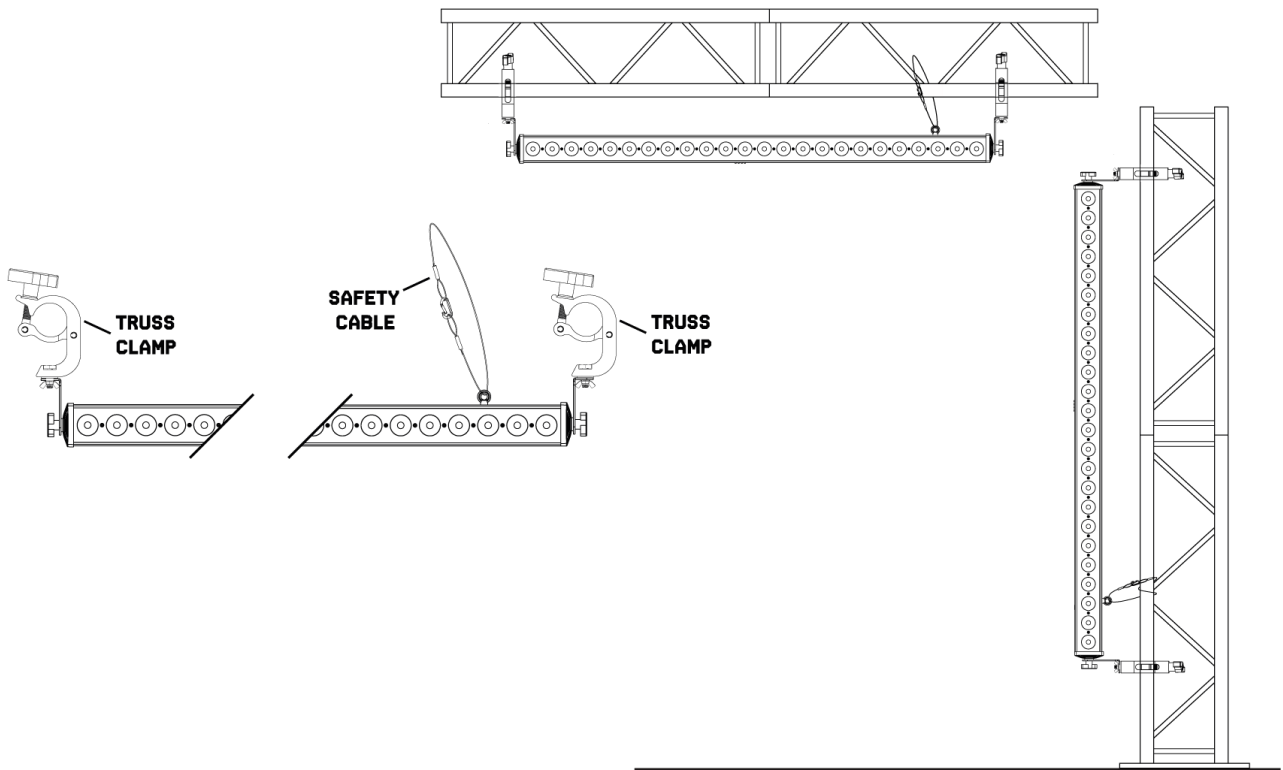

DMX CHANNELS

6 & 8 CHANNELS

8 CH	6CH	FUNCTION	VALUE	DESCRIPTION
1		Dimmer	000-255	All dimmer 0-100%
2		Strobe	000-255	Strobe
3	1	Colour	000-255	Red 0-100%
4	2		000-255	Green 0-100%
5	3		000-255	Blue 0-100%
6	4		000-255	White 0-100%
7	5	Chase	000-007	No function
			008-012	Colour Chase 1
			013-016	Colour Chase 2
			017-020	Colour Chase 3
		-.....	Every 3 step different chase
			227-247	Colour Chase 59
		248-255	Sound controlled strobe	
8	6	Speed	000-255	Speed control slow to fast (only in active mode 1-16)

12 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-255	All dimmer 0-100%
2	Strobe	000-255	Strobe
3	Section 1	000-255	Red 0-100%
4		000-255	Green 0-100%
5		000-255	Blue 0-100%
6		000-255	White 0-100%
7	Section 2	000-255	Red 0-100%
8		000-255	Green 0-100%
9		000-255	Blue 0-100%
10		000-255	White 0-100%
11	Chase	000-007	No function
		008-012	Colour Chase 1
		013-016	Colour Chase 2
		017-020	Colour Chase 3
	-.....	Every 3 step different chase
		227-247	Colour Chase 59
		248-255	Sound controlled strobe
12	Speed	000-255	Speed control slow to fast (only in active mode 1-16)



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

