# beamZ

## BEAMZ MADE EAZY

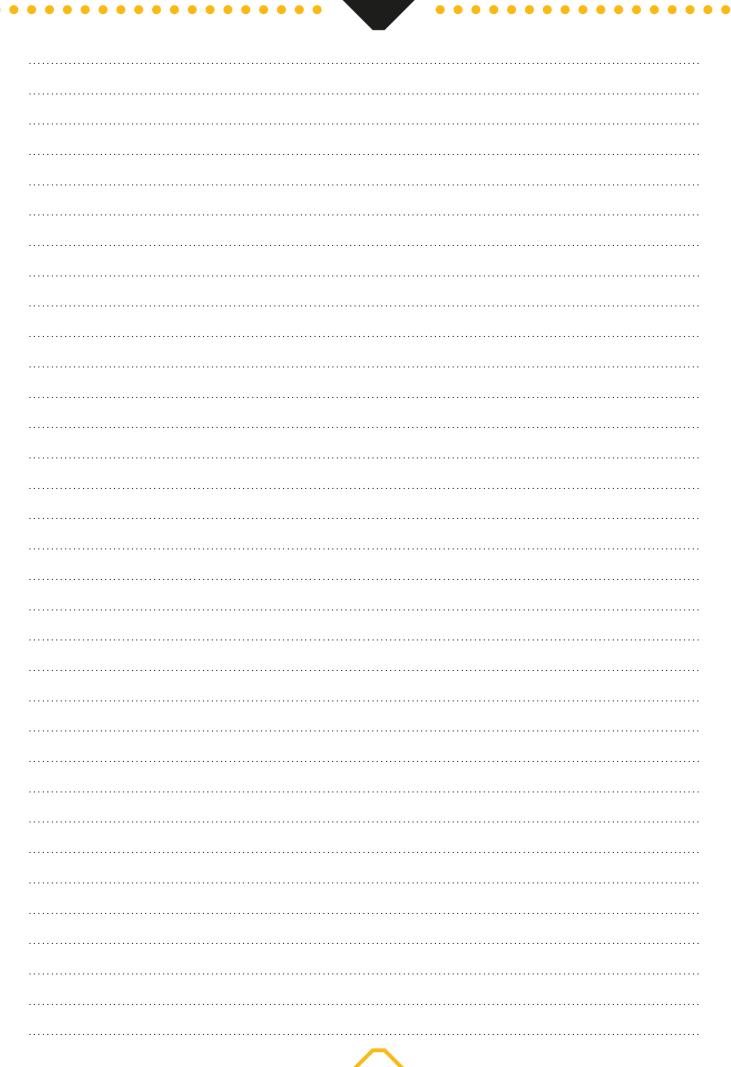153.240 V2.0

# PARTYBAR 3
# QUICK START GUIDE

# CONTROL MENU

| MENU | | DESCRIPTION |
|------|------|------|
| A1 | Auto program | 1-19 From slow to fast |
| A2 | Colour chase | 1-19 From slow to fast |
| A3 | Fade mode | 1-19 From slow to fast |
| A4 | Sound mode | |
| A5 | Strobe mode | 1-19 Different colour effect |
| R | Red | Dimmer 0-255 |
| G | Green | Dimmer 0-255 |
| B | Blue | Dimmer 0-255 |
| U | White | Dimmer 0-255 |
| D | DMX mode | DMX Address 1-512 |
| IP | IP mode | 1-64 |

# DMX CHANNELS

| CHANNEL | FUNCTION | VALUE | DESCRIPTION |
|---------|----------|-------|-------------|
| 1 | Macro | 000-010 | No function |
| | | 011-050 | Static Colour |
| | | 051-100 | Colour jump |
| | | 101-150 | Colour fade |
| | | 151-200 | Sound mode |
| | | 201-255 | Strobe all colour |
| 2 | | 000-255 | Colour macro |
| 3 | Speed | 000-255 | Speed adjustable |
| 4 | Dimmer | 000-255 | Master dimming |
| 5 | Colour | 000-255 | Red dimming |
| 6 | | 000-255 | Green dimming |
| 7 | | 000-255 | Blue dimming |
| 8 | | 000-255 | White dimming (Magic bol) |

# BEAMZ

## YOUR FUTURE
## YOUR SKILLS
## YOUR PLATFORM
## YOUR PARTY
## YOUR EVENT

**beamZ**

is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

**BEAMZLIGHTING.COM**